


Fiberframe

Description

Fiberframe, 24 x LC adaptor blue, OS2, UPC, 48 x pigtails, DIN
FF1-BLCUD-2448-SM-100-2OS0

Features

- Standard 19" 1U size
- Lightweight aluminium construction
- Telescopic drawer with tilt of 25°
- Up to 48 fibers per 1U
- Separate storage area for loose tubes and pigtails inside the housing
- 2 perforated plates integrated in the rear of the housing
- Additional exchangeable adapter plates for different cable systems available
- Moveable brackets for either even, reset or salient mounting
- ACS splice cassette technology accepting up to 24 fibers per cassette
- Colour coded pigtails as a standard
- Optional zero space cable management bar

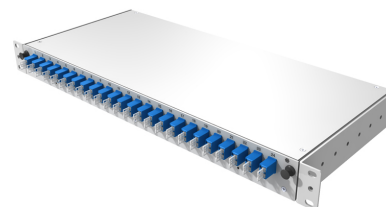

Technical data

Mechanical data

Characteristics	Values
Product family	Fiberframe
Suitable for	Splicing
Dimension (Width x Length x Height) (mm)	439 x 230 x 44
Dimension (Width x Length x Height) (inch)	17.3 x 9.1 x 1.7
Weight (kg)	2.2
Weight (lbs)	4.9
Material module	anodised aluminium
Colour module	silver
Number of cassettes (pcs)	2
Mounting type	Front mounting
Drawer Tilt (°)	25
Number of Adaptor front (pcs)	24
Adaptor type front	LC
Adaptor type front polishing	UPC
Adaptor colour front	blue
Colour code	DIN

Optical data


Characteristics	Values
Fiber type	Singlemode 9/125 µm OS2
Module insertion loss	Singlemode OS2: ≤0.50 dB
Module return loss	Singlemode OS2 PC: ≥50dB

Environmental data

Characteristics	Values
Resistance to impact	IK03
Ingress protection degree	IP20
Free of halogen	Yes
RoHS compliant	Yes
REACH compliant	Yes

Fiberframe

Technical drawing

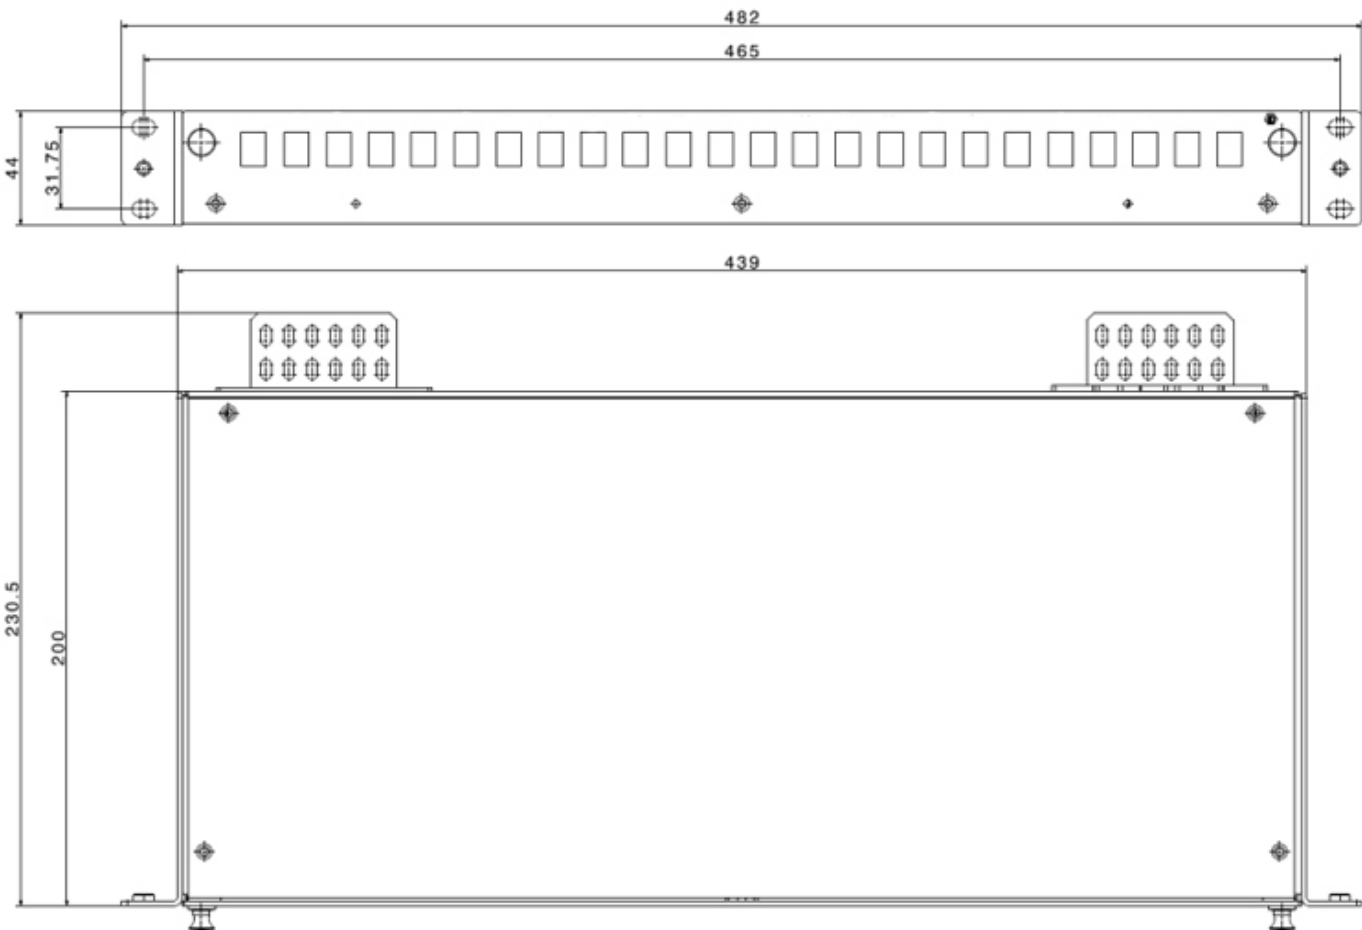

Ordering information

Description	Item number
Fiberframe, 24 x LC adaptor blue, OS2, UPC, 48 x pigtails, DIN	85063219

Related Documents

Installation manual	DOC-0000711362
---------------------	----------------