


FB-00-PP1U-24FLT-S6AJK-BK

1U/24Port Pre-loaded Cat.6A Flat Patch Panel



SPECIFICATION SHEET

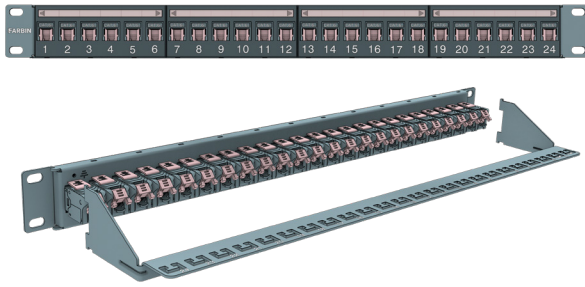

Description

FARBIN FB-00-PP1U-24FLT-S6AJK-BK, 1U Pre-loaded Flat Patch panel with 24pcs of Cat.6A Shuttered Keystone Jacks. Panel contains Magnify ID-Label and Strain Relief Bar

Standards & Applications

- ANSI/TIA-568.0-E and ANSI/TIA-568.2-D
- ANSI/TIA-607
- ISO/IEC 60603-7
- ISO/IEC 11801-1 Class Ea
- EN 50173-1 & 2 Class Ea

Mechanical Characteristics

Support-bar:	1.5mm Thickness with Black (RAL9005) color painted
Rear Panel:	1.5mm Thickness with Zinc-plated
Front Panel Edge:	Black (RAL9005) color painted after Zinc-plated for both side
Front Panel:	ABS, UL 94-HB


FARBIN 24-port Pre-loaded Flat Patch panels shall consist of a metal panels and rear Strain Relief Bar.

The panel is Pre-loaded with 24pcs Cat.6A STP high quality **Component-rated keystone jacks**.

The panel shall have the ability to allow for single port replacement of inoperative ports. Panel with label ID holder shall **Magnify the label print**.

Key Features and Benefits

- Mounts on 19-inch equipment cabinets and network racks
- The keystone jacks provide **superior Alien crosstalk suppression** and protect critical data from EMI (Electromagnetic Interference) and RFI (Radio Frequency Interference).
- Dedicated areas allow for port identification without adhesive labels
- Magnifying ID-Label** ensure visibility of port labels
- Port numbering to facilitate port location
- Includes rear **cable management Support-bar** to facilitate cable routing
- Panel feature a Stainless-steel plate to provide grounding continuity between jacks and panel
- Convenient reconfiguration and terminated cables on the patch panel so hardware is not disturbed when adding or removing cable




Magnifying ID-Label

- Label holder Lens for easy reading




Backward Compatible

- Panel accepts both Cat.6 and Cat.6A keystone jacks




Bounding Jumper Kit

- Shielded panel and bounding-kit protect data from EMI/RFI




Robust Structure

- SPCC rear panel, 1.5mm thickness with Zinc-plated




Strain Relief Bar

- Rear support bar help to manage and route rear cable



Easy Move and changes

- Easy UTP/STP keystone jack snap in and out of the panel

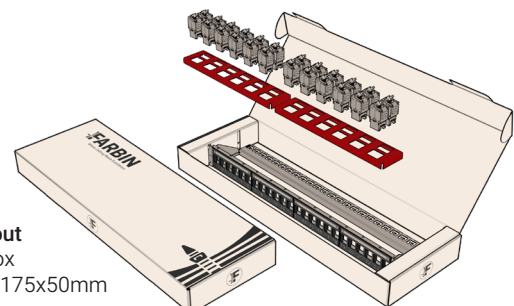

Packing Layout

- Cardboard box
- LxWxH: 520x175x50mm

The information contained in this document is valid and correct at the time of issue. FARBIN reserves the right to modify details without notice in light of subsequent standard/specification changes and ongoing technical developments.